

# Privacy Shield Installation

Installation and connection of the Privacy Shield to a Panomera®

**PANOMERA®**

## Preparation and Installation

- ▶ Open and remove the four frame screws counterclockwise using an Allen key (5).



- ▶ Remove the frame.



- ▶ Using both hands, carefully pull the inner frame of the camera out of the housing.



# Privacy Shield Installation

Installation and connection of the Privacy Shield to a Panomera®

PANOMERA®




- ▶ Remove the inner frame.



## ATTENTION

Hardware damage

- ▶ When removing the cable tie, be careful not to damage the camera cable.

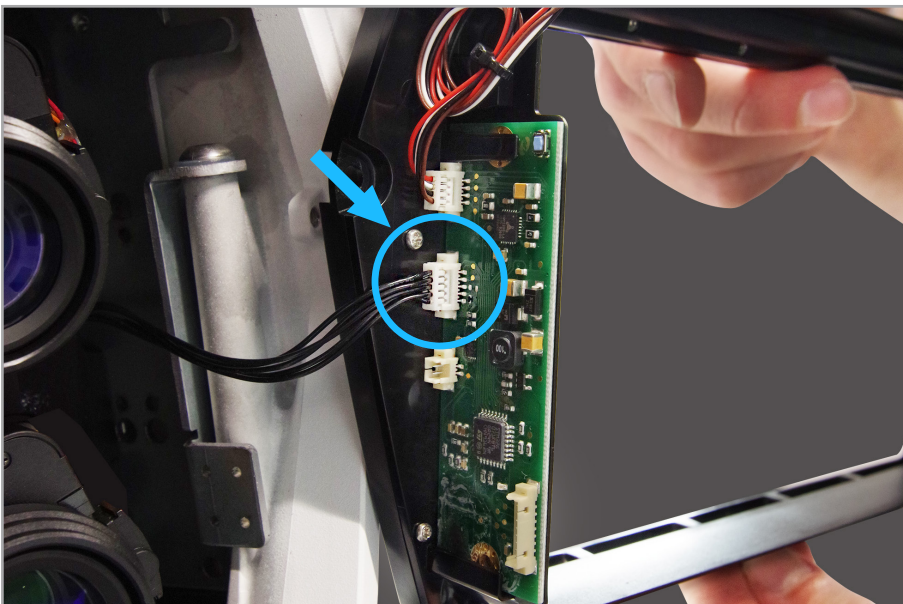

- ▶ Take the Privacy Shield frame and connect the exposed camera cable to the middle port of the board.



# Privacy Shield Installation

Installation and connection of the Privacy Shield to a Panomera®

PANOMERA®



## ATTENTION

- ▶ Make sure that no cable is pinched.
- ▶ Now carefully slide the Privacy Shield frame into the camera housing with both hands.



- ▶ Attach the frame to the camera housing using the mounting screws.



- ▶ Then tighten the screws clockwise with an Allen key (3).

# Privacy Shield Installation

Installation and connection of the Privacy Shield to a Panomera®

PANOMERA®




- ▶ Put the frame back on the camera.



## NOTE

- ▶ To avoid material stresses, retighten the screws crosswise with an Allen key (5) in a clockwise direction, if necessary.

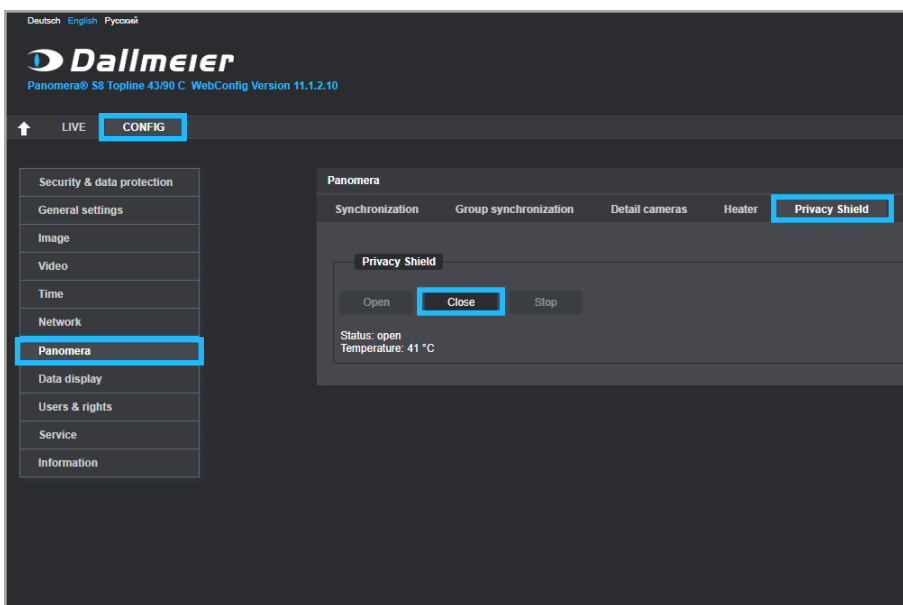


## Configuration in NetConfig3

- ▶ Start the configuration interface **NetConfig3** directly or in **PService3**.
- ▶ Then select the **CONFIG** tab.
- ▶ From the **Panomera** menu, select the **Privacy Shield** tab.
- ▶ If the **Privacy Shield status window** appears, everything is connected correctly.
- ▶ Click **Close**.


# Privacy Shield Installation

Installation and connection of the Privacy Shield to a Panomera®

PANOMERA®

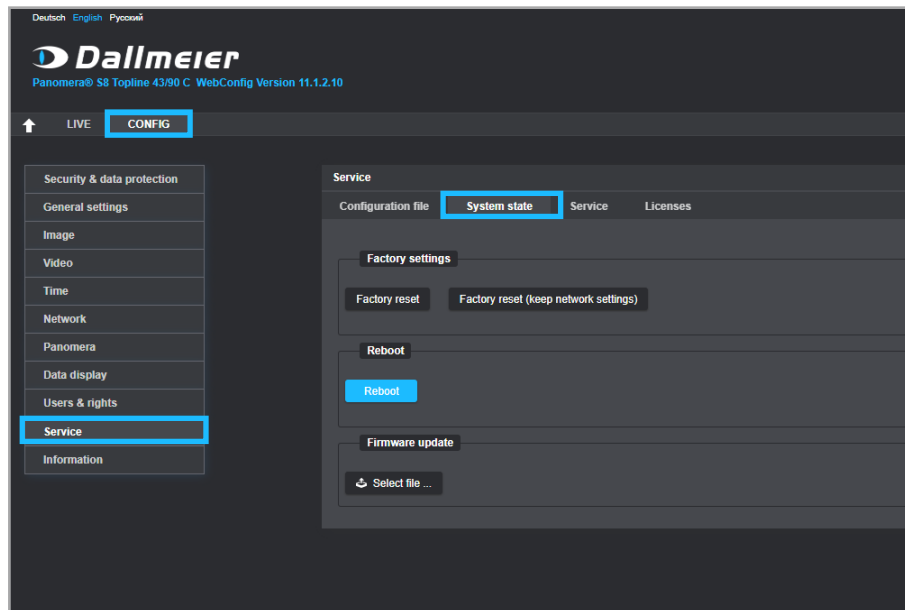

- ▶ In the **Service** menu, select the **System state** tab.
- ▶ Click **Reboot** to boot the system.

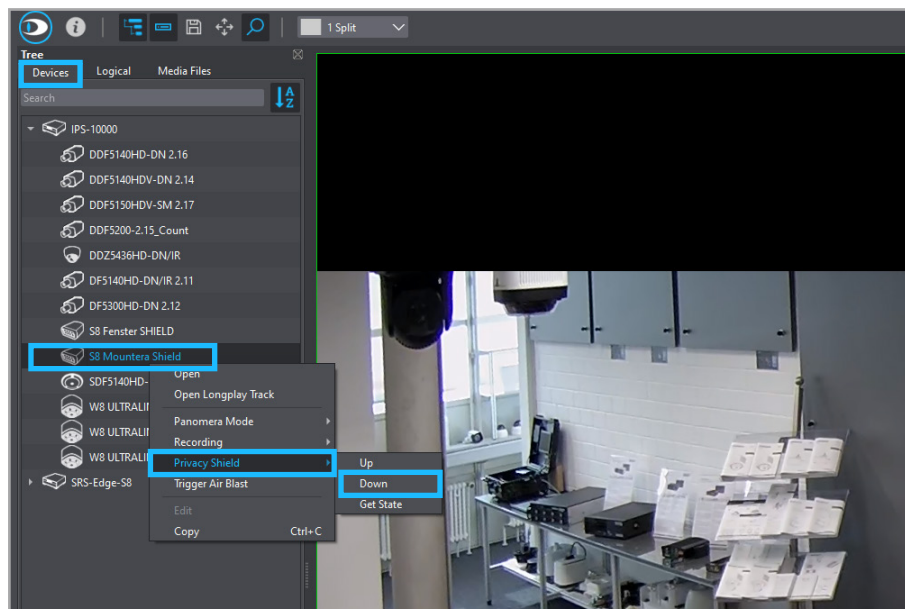

## SeMSy® Compact Control

- ▶ Select the **Devices** tab.
- ▶ The device tree is displayed.
- ▶ Select the camera with the Privacy Shield installation.
- ▶ Then select **Privacy Shield** from the pop-up menu and activate it by clicking **Down**.



- ▶ The Privacy Shield is turned on and the camera is visibly inactive.

Dallmeier electronic GmbH & Co.KG | Bahnhofstr. 16, 93047 Regensburg, Germany | +49 941 8700-0 | dallmeier.com

All trademarks identified by \* are registered trademarks of Dallmeier electronic GmbH & Co.KG.

Third-party trademarks are named for information purposes only. Dallmeier electronic respects the intellectual property of third parties and always attempts to ensure the complete identification of third-party trademarks and indication of the respective holder of rights. In case that protected rights are not indicated separately, this circumstance is no reason to assume that the respective trademark is unprotected.

Specifications subject to change without notice. Errors and misprints excepted. Pictures may differ from the actual product.



© 2023 Dallmeier electronic V1.1.0 2023-03-28 5/5

MADE IN GERMANY 

