

# DOMERA®

BEYOND THE IMAGE.






INTELLIGENT



PICTURE-PERFECT



**VERSATILE** 



## PIONEERING VIDEO TECHNOLOGY 'MADE IN GERMANY'

100% DEVELOPED AND MANUFACTURED IN REGENSBURG, GERMANY

## WHY 'MADE IN GERMANY' OR 'MADE IN EUROPE' ARE BECOMING MORE AND MORE OF A QUALITY SEAL

The label 'Made in Germany', which is often perceived as old-fashioned, is experiencing an amazing renaissance — especially among customers of B2B video technology solutions. Reliable supply chains, cybersecurity and privacy are the most important key words here.

With 'Made in Germany', we guarantee our customers the highest standards in these important fields. Quality, proximity of suppliers and our 'Green Global Security' philosophy also ensure sustainability and environmental protection.



Qualification and short distances as locational factors



Maximum vertical range of manufacture also means maximum cybersecurity and data protection





MADE IN GERMANY

### PIONEERING VIDEO TECHNOLOGY FROM GERMANY

WHY CHOOSING A GOOD CAMERA IS SIMPLY NOT ENOUGH.



'My ambition and at the same time my task as CTO at Dallmeier is to develop products that offer real added value for the customer and are at the same time discussed on the market. In this respect, probably the greatest challenge for European companies is to perform a real miracle: Reconciling the highest quality standards, competitive prices, ethical responsibility and labor costs.

We achieve this by combining quality and innovation as part of our "Made in Germany" strategy: quality means durability and low maintenance. Innovation saves costs through efficiency and functionality.'

Thomas Reisinger, Chief Technical Officer (CTO), Dallmeier electronic

#### **GDPR AND CYBERSECURITY**

Cybersecurity and data protection play an increasingly important role in today's investment decisions. Dallmeiers' systems meet the highest standards for data protection and have all state-of-the-art features for cybersecurity. On the technical side, we ensure this with regularly executed standardised security tests by external experts. On the political side, we make sure we develop, manufacture and support our products and solutions under 100% constitutional and democratic political framework conditions.

### **GREEN GLOBAL SECURITY**



life cycles and high energy efficiency of our products.

Against the backdrop of geopolitical changes, the aspect of ethical responsibility is becoming more and more important. Companies are increasingly asking themselves what consequences their investment decisions have on the human rights situation in other parts of the world. We adhere to the highest standards in our supply chain and develop, produce and manufacture our softand hardware systems in Regensburg, Germany.











## **DOMERA® - BEYOND THE IMAGE.**

PROBABLY THE MOST VERSATILE CAMERA IN THE WORLD

The Domera® camera series offers a unique combination of:

 AI-based video analytics for a variety of analytics applications with 'Deep Al' object classification in the camera

Innovative lighting system
 without the lighting issues of conventional dome cameras

 Motorised three-axis adjustment for easy setting and readjustment via remote access (Dallmeier Remote Positioning Dome, RPoD)

 Modular housing and mounting system for an extremely time-saving assembly and setup, minimal inventory and low training requirements

 Support of ONVIF profiles M, S and T for integration into almost any Video Management System (VMS)

With Domera®, more than 90% of all typical video applications can be implemented indoor and outdoor – including maximum quality and security as well as minimum Total Cost of Ownership (TCO).





### INTELLIGENT

From image to result



#### Domera® OS

for a wide range of analytics applications, highest cybersecurity and easy configuration.

- Al object classification for accurate results
- Wide variatey of analytics applications
- Triggering of events via MQTT, relays, etc.
- Premium maintenance package including updates for the neural network
- A dedicated camera operating system for maximum security and functionality

### PICTURE-PERFECT

Don't miss a thing




#### Smart technologies

for maximum image quality and optimal lighting in every situation.

- Latest SoC technology
- Adaptive IR and white light LEDs
- Utmost light sensitivity
- True HDR

### **VERSATILE**

100 % adaptable



Domera® RPoD technology & mounting system for easy installation and quick readjustment via remote access.

- Easy mounting, installation and motorised three-axis adjustment
- Maximum flexibility
- Fits every customer environment
- Widest variety of mounting, housing and lighting options

 $\overline{6}$ 




Domera® cameras are equipped with the latest SoC technology and intensively trained neural networks.

They capture images in high resolution and analyse them independently of movements in the background (green areas, water surfaces, etc.).

Defined objects (people, vehicles, etc.) are classified in real time.

- Deep Al object classification based on pre-installed neural networks
- Integrated EdgeAnalytics apps for a wide range of applications
- Regular updates
   of the neural networks
- **Customised neural networks**if desired, within the framework of a development partnership

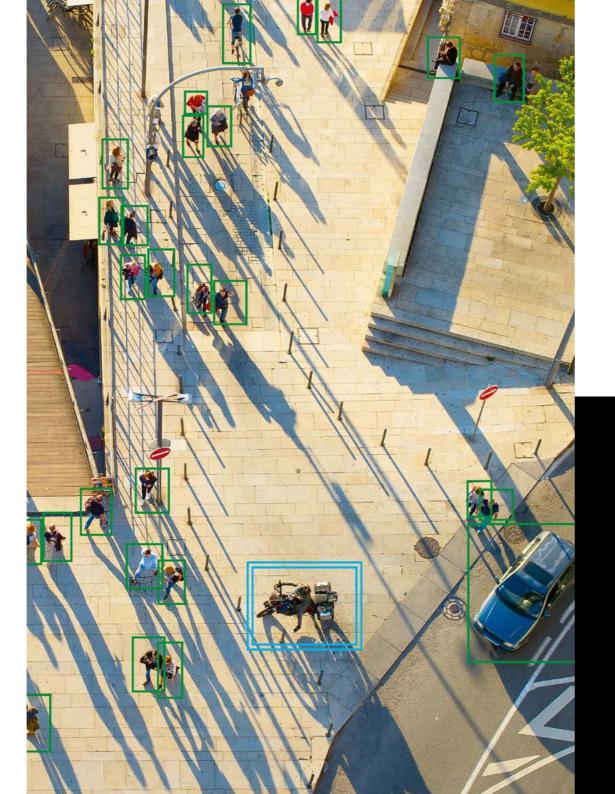

### **CUSTOMISED ANALYTICS**

WHICH ANALYTICS APPLICATION WILL SOLVE YOUR PROBLEM?

CAMERA-BASED PEOPLE COUNTING

**SMART MOTION DETECTION** 

**VEHICLE SEARCH** 

FENCE GUARD

MOTION GUARD

PERIMETER PROTECTION

**NO-PARKING ZONES** 

LICENSE PLATE VERIFIER

'TRIPWIRE' FUNCTIONALITY

LOITERING GUARD

**OBJECT ANALYTICS** 

WRONG WAY DETECTION 'SMALL'

'ACTIVE ALARM' WITH VOICE MESSAGE

## **OUTPUT OF ANALYTICS DATA**

**VIA MQTT AND OTHER PROTOCOLS** 



















A unique combination of features ensures outstanding image quality even in difficult conditions.

- True HDR & latest chip generation for optimal dynamics
- IR or white light outside the bubble no stray light, maximum contrast
- Adaptive lighting can be individually adjusted according to the position of the camera lens
- Maximum details capture any environment with up to 4K resolution
- Maximum light sensitivity
   optimal image quality in any light situation
- RPoD Remote Positioning Dome for easy alignment and readjustment via remote access from any web browser



Improved low-light performance



Alignment and readjustment of the camera remotely







Theoretically, more than 300 different product variants can be 'built' with Domera® components. This is made possible by a well thought-out system of five camera bases and various lighting rings, as well as different housing and mounting variants.

For end customers and installers, this means less time spent on implementation, minimal stock-keeping and low training effort.

- Modular system with camera bases, lighting covers, adapters and mounting options
- Dallmeier 'only one Allen key' philosophy saves time and cost during installation and maintenance
- Easy replacement and retrofit same mounting and screw holes spacing as the previous models
- Browser-based installation and orientation without additional software
- Optional integrated speaker for live public address or event-triggered audio playback
- Energy-efficient thanks to standard PoE (Power over Ethernet)

**ADAPTERS** 

**COVERS** 

CAMERA BASES

MOUNTING OPTIONS



### **INDUSTRY-WIDE UNIQUE COMBINATION**

PROBABLY THE MOST VERSATILE CAMERA IN THE WORLD

#### DOMERA®: A NEW GENERATION OF DOME CAMERAS

The Domera® camera series features high image quality with up to 4K resolution, HDR functionality and very high light sensitivity. This makes the cameras ideal for indoor and outdoor use – even under difficult lighting conditions.





The adaptive IR and white light LEDs are mounted in the Dual Matrix LED Ring outside the bubble and can be controlled individually. This allows users to prevent, for example, overexposure and reflections or to additionally illuminate dark areas in a targeted manner.

Depending on requirements, it is possible to switch dynamically between IR and white light illumination, e.g. to deter detected objects. The dome housing and the external mounting of the LEDs make it more difficult for spiders to settle down. In addition, there are significantly fewer light reflections, e.g. due to scratches. Both of these features significantly extend the maintenance intervals.



## DALLMEIER RPOD: CAMERA ORIENTATION AND READJUSTMENT VIA REMOTE ACCESS

The motorised three-axis adjustment with the Dallmeier RPoD ensures time-saving commissioning. Its PTRZ (Pan Tilt Roll Zoom) function allows users to adjust the image section remotely and still change it at a later time. A 90-degree rotation for the corridor mode can also be realised with only a mouse click. The complete setup of the camera is browser-based and requires no additional software.

#### WHAT ABOUT THE SPIDER AND THE MAINTENANCE INTERVAL?

For classic box cameras with a sunshield and IR lighting the regular removal of spider webs is an enormous cost factor. Not anymore with the Domera® dome housing.





## **IR / WHITE LIGHT**

EXTERNAL DUAL MATRIX LED RING



**RPOD** 

REMOTE
POSITIONING DOME

## **DOMERA®** RDF 6800 DN

HIGHEST RESOLUTION COMBINED WITH ARTIFICIAL INTELLIGENCE





Corridor Mode









### **MODEL HIGHLIGHTS**

Resolution 8 MP (4K)

- PTRZ three-axis adjustment
- Deep AI object classification
- Domera® mounting system

EdgeAnalytics Al Apps

Adaptive IR / white light1

### **TECHNICAL DATA**

F1.3 / 4.5–9.7 mm F1.8 / 12-40 mm Lens

Angle of view 110°-47° 35.2°-12.1° horizontal

**Amount** 8 Megapixel sensor pixel

< 0.05 lux ( AGC ON) Light sensitivity

**√**1/ **√**1 360° IR / white light

Axis adjustment motorised

AI EdgeAnalytics

Corridor mode

Audio I/O

## **DOMERA®** RDF 6400 DN

HIGHEST LIGHT SENSITIVITY WITH ARTIFICIAL INTELLIGENCE





Corridor Mode









#### **MODEL HIGHLIGHTS**

- 4 MP resolution with high light sensitivity
- PTRZ three-axis adjustment

Domera® mounting system

- Deep AI object classification
  - Adaptive IR / white light¹
- EdgeAnalytics Al apps

### TECHNICAL DATA

F1.3 / 4.5–9.7 mm F1.8 / 12-40 mm Lens

Angle of view 111.2°-47.5° 36.1°-12.4° horizontal

Amount 4 Megapixel sensor pixel

< 0,0005 lux (AGC ON) Light sensitivity

**√**1/ **√**1 360° IR / white light

Axis adjustment motorised

AI EdgeAnalytics

Corridor mode

Audio I/O

16 1 Optional 1 Optional

## **DOMERA® RDF 5140 DN**

HIGH RESOLUTION WITH MOTORISED THREE-AXIS ADJUSTMENT



Low-Light



Corridor Mode







Resolution 5 MP

PTRZ three-axis adjustment

Video compression H.265

Domera® mounting system

VCA EdgeAnalytics

Adaptive IR / white light1

#### **TECHNICAL DATA**

F1.4 / 3–10 mm F1.8 / 12-40 mm Lens

Angle of view horizontal

111.0°-31.9°

23.8°-8.3°

**Amount** sensor pixel

5 Megapixel

Light sensitivity

< 0.03 lux (AGC ON)

360° IR / white light

**√**1/ **√**1

Axis adjustment motorised

Al EdgeAnalytics

Corridor mode

Audio I/O



Corridor Mode





Low-Light



## **DOMERA®** RDF 5120 DN

HIGH LIGHT SENSITIVITY WITH MOTORISED THREE-AXIS ADJUSTMENT



### **MODEL HIGHLIGHTS**

Resolution 2 MP

PTRZ three-axis adjustment

Video compression H.265

Domera® mounting system

VCA EdgeAnalytics

Adaptive IR / white light<sup>1</sup>

### TECHNICAL DATA

F1.4 / 3–10 mm F1.8 / 12-40 mm Lens

Angle of view horizontal

111.0°-31.9°

23.8°-8.3°

Amount sensor pixel

2 Megapixel

Light sensitivity

< 0.03 lux (AGC ON)

360° IR / white light

**√**1/ **√**1

Axis adjustment motorised

AI EdgeAnalytics

Corridor mode

Audio I/O

18

## **DOMERA®** *RDF 5I40 DN (€)*









### **MODEL HIGHLIGHTS**

Resolution 5 MP

PTRZ three-axis adjustment<sup>2</sup>

Video compression H.265

Domera® mounting system

VCA EdgeAnalytics

### **TECHNICAL DATA**

motorised

AI EdgeAnalytics

Corridor mode

Audio I/O

F1.4 / 3–10 mm F1.8 / 12-40 mm Lens Angle of view 111.0°-31.9° 23.8°-8.3° horizontal Amount 5 Megapixel sensor pixel < 0.03 lux (AGC ON) Light sensitivity 360° IR / white light Axis adjustment √2





## **DOMERA®** *RDF 5I20 DN (€)*

**REVOLUTIONARY DOMERA® SYSTEM** AT AN ATTRACTIVE PRICE **→** Dallmeıer **→** Dallmeıer

### **MODEL HIGHLIGHTS**

Resolution 2 MP

PTRZ three-axis adjustment<sup>2</sup>

Video compression H.265

Domera® mounting system

VCA EdgeAnalytics

### TECHNICAL DATA

F1.4 / 3–10 mm F1.8 / 12-40 mm Lens

Angle of view horizontal

111.0°-31.9°

23.8°-8.3°

Amount sensor pixel

2 Megapixel

Light sensitivity

< 0.03 lux (AGC ON)

360° IR / white light

Axis adjustment motorised

**√**2

AI EdgeAnalytics

Corridor mode

Audio I/O

21

1 Optional 2 Third axis (roll) up to approx. 45°

## DOMERA® SDF 6800 DN











### **MODEL HIGHLIGHTS**

• Resolution 8 MP (4K)

Fisheye lens

Deep Al object classification

Domera<sup>®</sup> mounting system

EdgeAnalytics Al Apps

• Adaptive IR / white light1

### TECHNICAL DATA

F2.8 / 1.6 mm Fisheye Lens Angle of view 360° horizontal Amount 8 Megapixel sensor pixel Light sensitivity < 0.05 lux (AGC ON) **√**¹/ **√**¹ 360° IR / white light Axis adjustment motorised AI EdgeAnalytics Corridor mode Audio I/O



### THE DOMERA® SERIES AT A GLANCE

EASILY REALISE OVER 90% OF ALL TYPICAL VIDEO APPLICATIONS

Amount sensor pixel

Lens

Angle of view horizontal

Maximum resolution

Light sensitivity

VCA EdgeAnalytics

AI EdgeAnalytics

Axis adjustment motorised

Corridor mode

Adaptive IR / white light

ONVIF Profile

Audio I/O







RDF6800DN

8 Megapixel

F1.3 / 4.5–9.7 mm F1.8 / 12–40 mm

3840 x 2160

< 0.05 lux (AGC ON)

360° ✓¹ / 360° ✓¹

M/S/T


**√**1

35.2°-12.1°

110°-47°

RDF6400DN

RDF5140DN

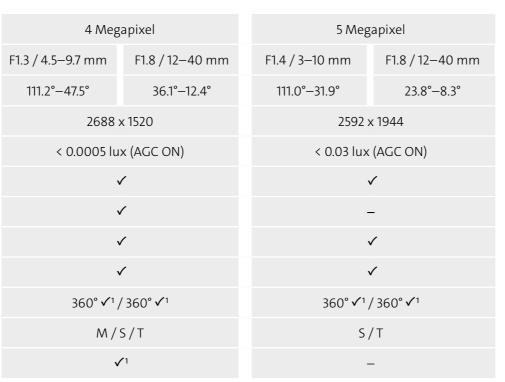









RDF5140DN (E)

RDF5120DN (E)

SDF6800DN

2 Megapixel		5 Megapixel		2 Megapixel		8 Megapixel
F1.4 / 3–10 mm	F1.8 / 12-40 mm	F1.4 / 3–10 mm	F1.8 / 12-40 mm	F1.4 / 3–10 mm	F1.8 / 12-40 mm	F2.8 / 1.6 mm Fisheye
111.0°-31.9°	23.8°-8.3°	111.0°-31.9°	23.8°-8.3°	111.0°-31.9°	23.8°-8.3°	360°
1920 x 1080		2592 x 1944		1920 x 1080		2880 x 2880
< 0.03 lux (AGC ON)		< 0.03 lux (AGC ON)		< 0.03 lux (AGC ON)		< 0.05 lux (AGC ON)
✓		✓		✓		✓
-		-		-		✓
✓		✓²		✓²		-
✓		-		-		-
360° ✓¹ / 360° ✓¹		180° <b>√</b> ¹/−		180° <b>√</b> ¹ / −		360° ✓¹ / 360° ✓¹
S/T		S		S		M/S/T
-		_		-		✓1

1 Optional

## **DOMERA® ACCESSORIES - HIGHLIGHTS**

EASILY REALISE OVER 90% OF ALL TYPICAL VIDEO APPLICATIONS


Lighting	Adapter		
Domera® Dual Matrix LED Ring		Domera® Surface Mount Adapter	
Domera® IR LED Stripe		Domera® Wall Bracket	
Housing cover		Domera® Wall Bracket with Speaker	
Domera® Housing Cover Aluminium LED Black			
	Mountera® accessories		
Domera® Housing Cover Aluminium Black		Mountera® Vandalproof Pole Adapter	
Domera® Housing Cover Aluminium White		Mountera® Box	

## DOMERA® LICENCING

### THE RIGHT LICENCE PACKAGE FOR YOU

BASIC PACKAGE	PREMIUM PACKAGE	SINGLE LICENCES	SINGLE LICENCES
<ul> <li>Updates maintenance (1 year)</li> <li>Security Domera® OS</li> <li>Features Domera® OS</li> <li>Features Essential AI Apps</li> <li>New Essential AI Apps</li> <li>Quality Essential AI Networks</li> </ul>	<ul> <li>Updates maintenance (5x 1 year)</li> <li>Security Domera® OS</li> <li>Features Domera® OS</li> <li>Features Essential AI Apps</li> <li>New Essential AI Apps</li> <li>Quality Essential AI Networks</li> </ul>	<ul> <li>Updates maintenance (5x 1 year)</li> <li>Security Domera® OS</li> <li>Features Domera® OS</li> <li>Features Essential AI Apps</li> <li>New Essential AI Apps</li> <li>Quality Essential AI Networks</li> </ul>	<ul> <li>Updates maintenance (5x 1 year)</li> <li>Security Domera® OS</li> <li>Features Domera® OS</li> <li>Features Essential AI Apps</li> <li>New Essential AI Apps</li> <li>Quality Essential AI Networks</li> </ul>
<ul><li>Warranty (2 years)</li><li>Hardware</li><li>Bring-in</li></ul>	<ul><li>Warranty (5 years)</li><li>Hardware</li><li>Bring-in</li></ul>	<ul><li>Warranty (5 years)</li><li>Hardware</li><li>Bring-in</li></ul>	
<ul> <li>Essential AI Apps (30 days)</li> <li>AI Motion Detection</li> <li>AI Tamper Detection</li> <li>AI Intrusion Detection</li> <li>AI Line Crossing</li> </ul>	<ul> <li>Essential Al Apps (unlimited)</li> <li>Al Motion Detection</li> <li>Al Tamper Detection</li> <li>Al Intrusion Detection</li> <li>Al Line Crossing</li> </ul>		> SEE DOMERA® IN ACTION



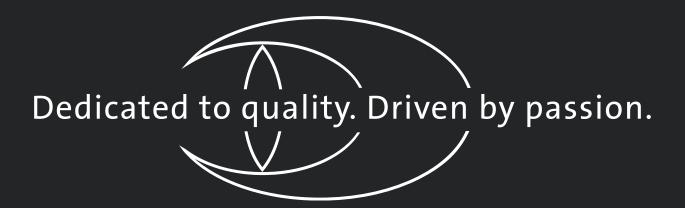

Dallmeier electronic GmbH & Co.KG Bahnhofstr. 16 93047 Regensburg Germany

Phone: +49 941 8700-0 Fax: +49 941 8700-180 info@dallmeier.com www.dallmeier.com

