


Weather-proof Housing

I/O Pinout

- DDZ4120HD Outdoor
- DDZ4130HD Outdoor
- DDZ4220HD Outdoor
- DDZ4230HD Outdoor

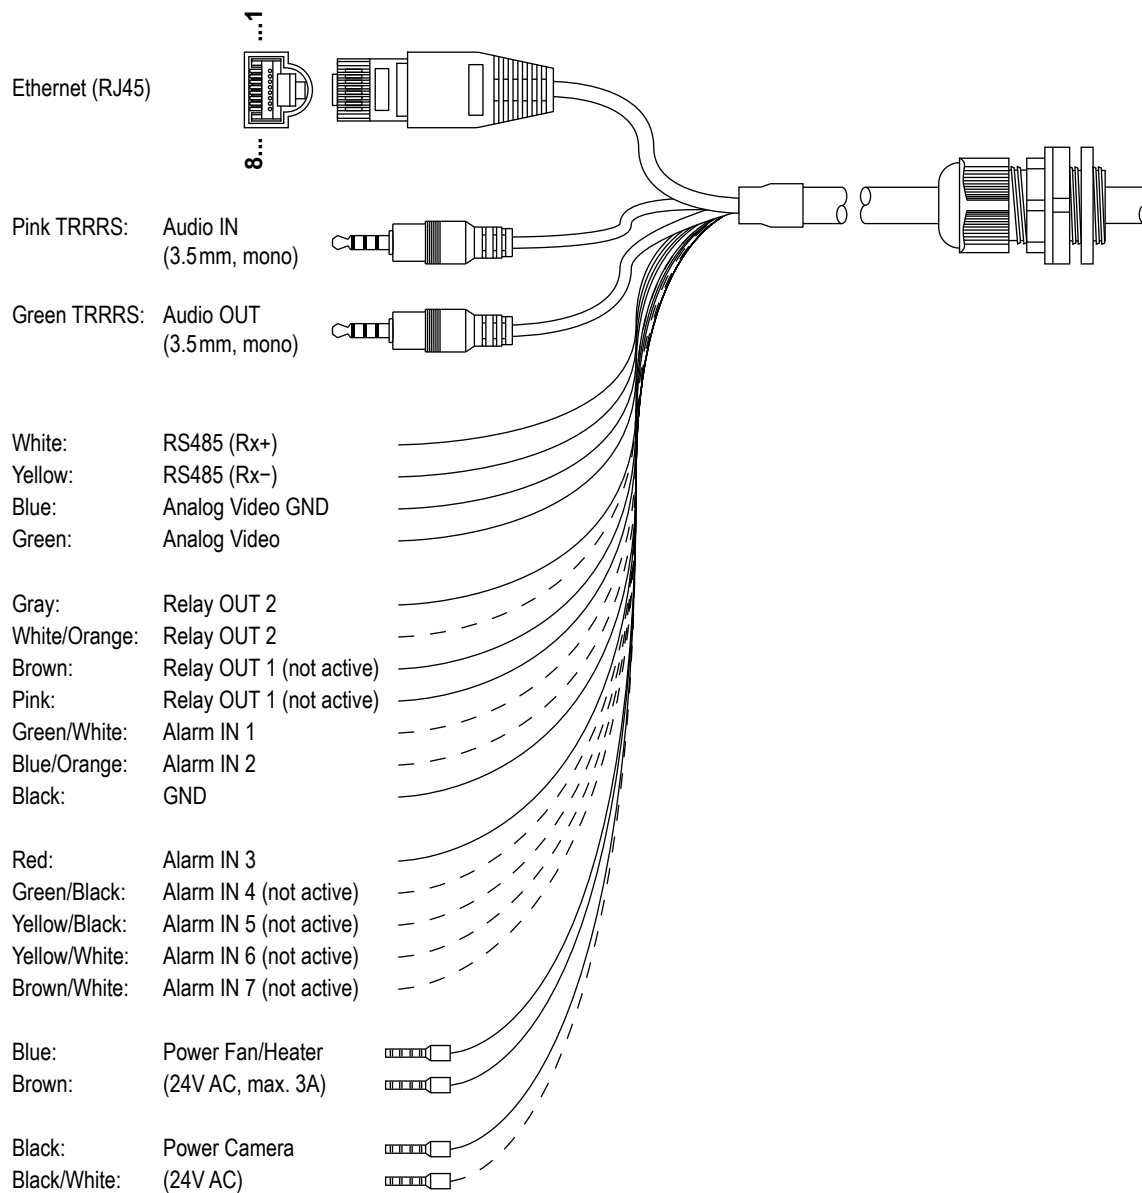

Note that

- the built-in fan/heater of the weather-proof housing must be separately supplied with 24V AC (max. 3A).
- the built-in fan/heater is only activated at a temperature of +5°C or below.
- the delivered silica gel packets must be placed behind the heater ring to avoid moisture and condensation damage.