

EXPORT AS SPLIT SET




SAVE SURVEILLANCE TAB WITH ACTIVE MULTI-SPLIT LAYOUT AS SPLIT SET

A **Surveillance** tab can be exported as a split set with the cameras active in it. The combination of multi-split layout and connected cameras is saved as a whole set and can also be reactivated as a set.

Use the procedure described here to export an active Surveillance tab as a split set:

- ▶ Activate any split layout in a **Surveillance** tab and connect the required cameras in the splits.

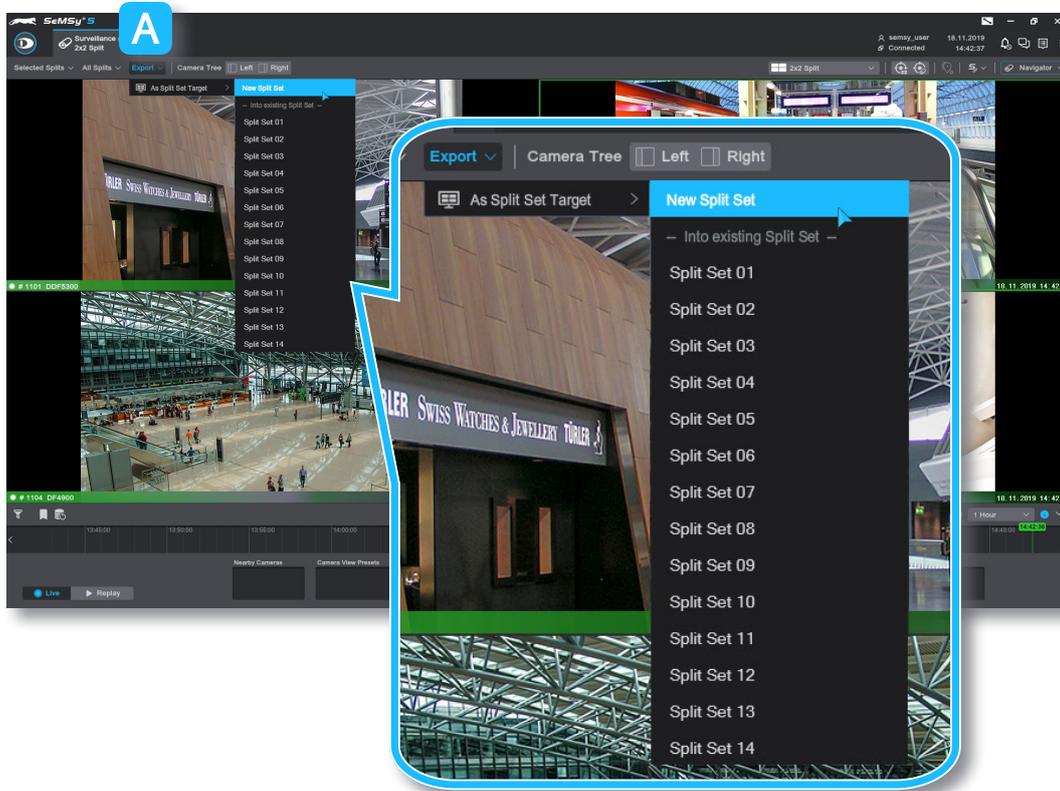

- ▶ Click the **Export** button **A** in the menu bar to display the advanced dialog.
- ▶ Select **As Split Set Target** to expand the split sets list.
- ▶ Select **New Split Set** to create a completely new entry.

The new entry is first saved as a new split set (and is also automatically named with it) and can later be renamed and further configured in the **Split Set Editor**, if required (see for this purpose the configuration documentation for “HEMISPHERE SeMSy® Split Set Editor”).

Integration into already existing Split Set:

If you integrate the new split set into an existing split set from the list, the split set is saved as a new **Target**. A split set can consist of several targets (all individual split sets). These can then be activated and used all at once, but also each individually.

