

PTZ LOCK / UNLOCK

LOCKING AND UNLOCKING THE CONTROL OF A PTZ CAMERA




Control of a PTZ camera can be locked for users who do not have permission. Unlocking is performed by an authorised user or by an authorised user with additional password. Alternatively, a time span can be entered after which the camera control is automatically enabled again. An overview of the operation of the feature:

- Open the **Navigator** and select the **Cameras** tab **A**.



- Right-click the required PTZ camera to display the camera context menu **B**.
- Click the **PTZ Lock / Unlock** option to open the corresponding **PTZ Lock / Unlock** dialog.

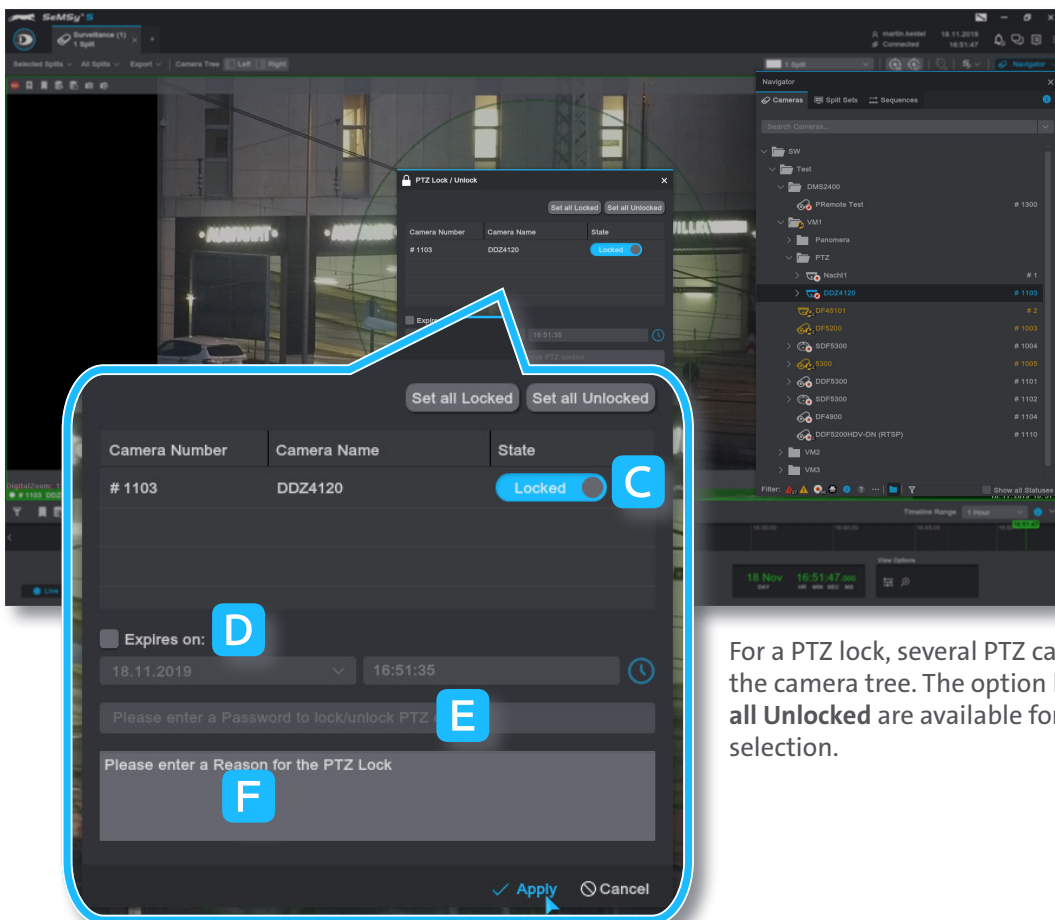

- In the **State** field, move the slider to **Locked** **C**.
- Activate the **Expires on** **D** option and select the unlock time if you want the camera to unlock automatically after expiration, if required.
- Enter a **Password** **E** for unlocking, if required (password option must be activated in the settings).
- Enter a **Reason** **F** for the lock, if required.
- Confirm with **Apply** to start the lock process.



For a PTZ lock, several PTZ cameras can be marked at once in the camera tree. The option buttons **Set all Locked** and **Set all Unlocked** are available for editing such a camera multi-selection.

PTZ LOCK / UNLOCK

LOCKING AND UNLOCKING THE CONTROL OF A PTZ CAMERA



A locked PTZ camera is indicated by the lock icon in the camera tree **A** and in the lower on-screen menu **B**. Tooltips additionally inform about the reason and further details of the PTZ lock:

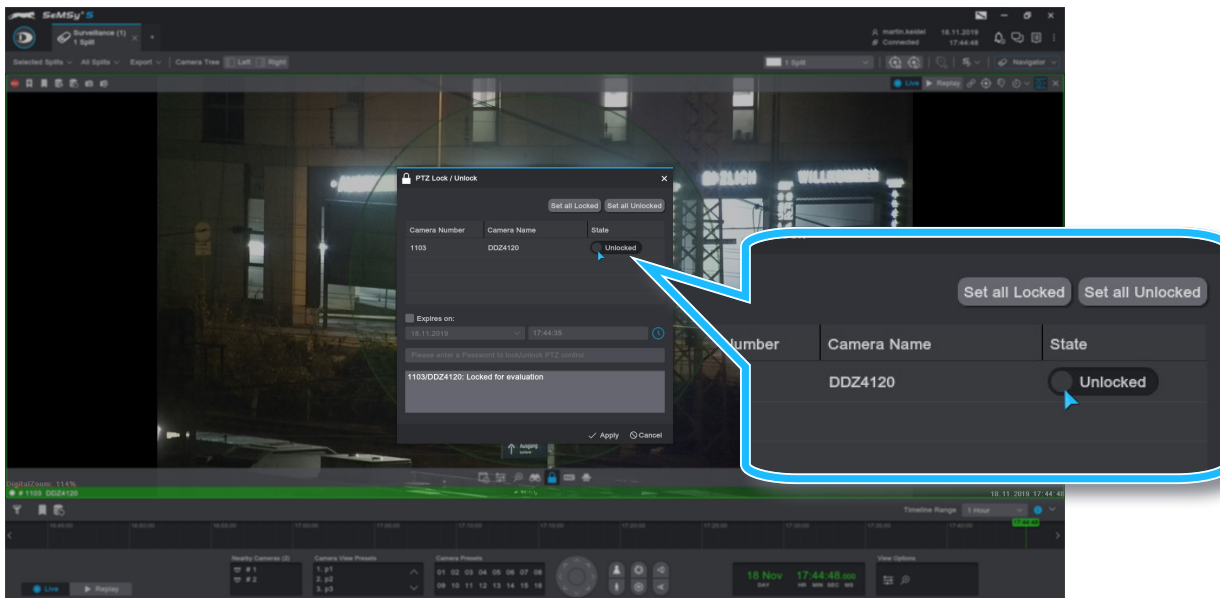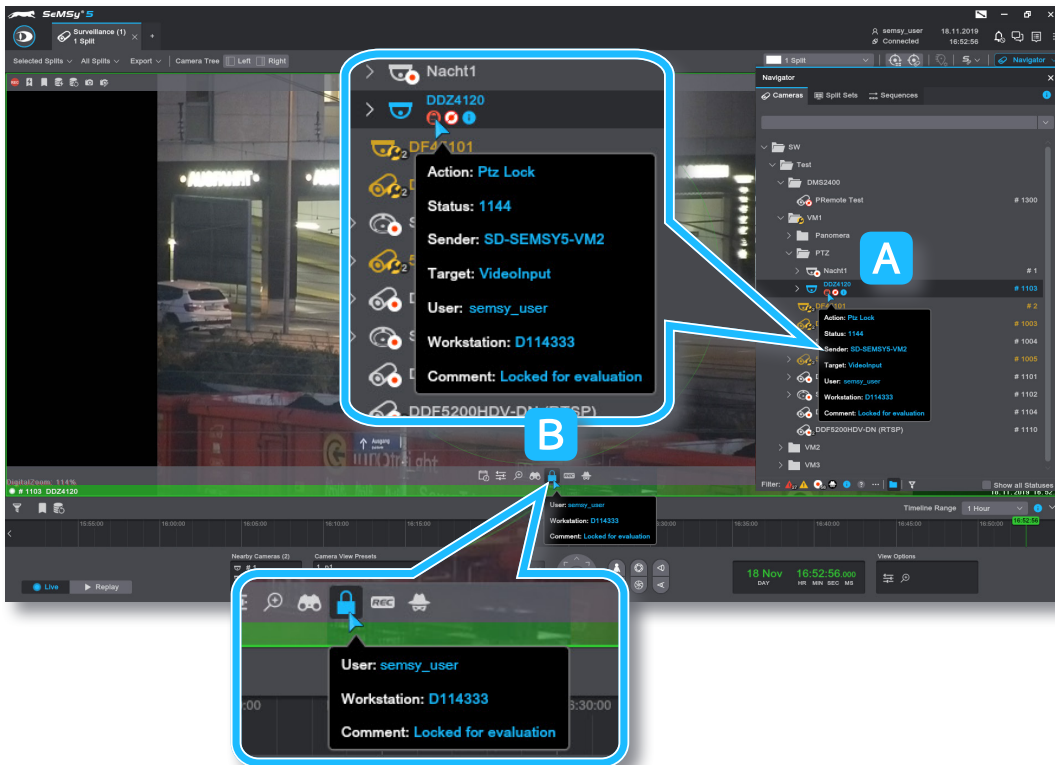

- ▶ To unlock, click the active lock icon in the lower on-screen menu or open the **PTZ Lock / Unlock** dialog from the camera context menu in the navigator's camera tree.
- ▶ Push the slider back to **Unlocked**.
- ▶ Enter the unlock **Password** if one has been assigned.
- ▶ Confirm the unlocking with **Apply**.

Dallmeier electronic GmbH & Co.KG | Bahnhofstr. 16, 93047 Regensburg, Germany | +49 941 8700-0 | dallmeier.com

All trademarks identified by ® are registered trademarks of Dallmeier electronic GmbH & Co.KG.

Third-party trademarks are named for information purposes only. Dallmeier electronic respects the intellectual property of third parties and always attempts to ensure the complete identification of third-party trademarks and indication of the respective holder of rights. In case that protected rights are not indicated separately, this circumstance is no reason to assume that the respective trademark is unprotected.

Specifications subject to change without notice. Errors and misprints excepted. Pictures may differ from the actual product.



© 2019 Dallmeier electronic V1.0.0 2019-11-18 2/2

MADE IN GERMANY

